


• Highlights



Pistol Type

-Industrial Air Screwdrivers-

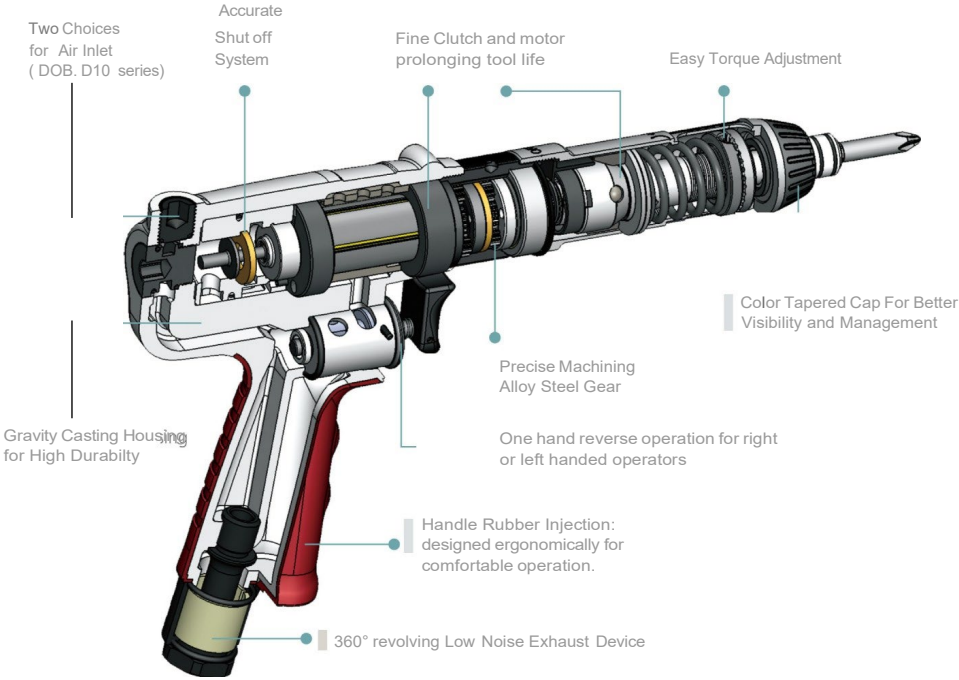

Torque Conversion

Nm			n	kg-cm	in-lbs
0.1			7	71.38	61.95
0.2	204	1.77	8	81.58	70.81
0.3	3.06	2.66	9	91.77	79.66
0.4	4.08	3.54			88.51
0.5	5.10	4.43			97.36
0.6	6.12	5.31			106.21
	7.14	6.20			115.06
	8.16	7.08	2		123.91
	9.18	7.97	3	3059	132.76
	10.20	8.85	4		141.61
	11.22	9.74	5		150.46
	12.24	10.6	6		159.31

SPECIFICATIONS

	Drive Size		Screw Size		Nm					
	inch	mm								
TDCS-D08-1500	1/4"Hex.	M2	0.4 - 0.7	3.5 - 8.8	1,500	0.70	1.54	1/4"	72	3.5
TDCS-D08-1100	1/4"Hex.	M2	0.4 - 1	3.5 - 8.8	1,100	0.70	1.54	1/4"	72	3.5
TDCS-D10-1600	1/4"Hex.	M2-M3	0.7 - 1.3	6.2 - 11.5	1,600	0.90	1.98	1/4"	75	5.5
TDCS-D10-900	1/4"Hex.	M3	0.7 - 2	6.2 - 17.7	900	0.90	1.98	1/4"	75	5.5
TDCS-D20-3500	1/4"Hex.	M3	0.7 - 2.3	6.2 - 20	3,500	1.07	2.35	1/4"	75	13
TDCS-D20-3000	1/4"Hex.	M3-M4	0.8 - 3	7.1 - 27	3,000	1.07	2.35	1/4"	75	13
TDCS-D20-2000	1/4"Hex.	M3-M4	0.8 - 4.5	7.1 - 40	2,000	1.07	2.35	1/4"	75	13
TDCS-D20-1100	1/4"Hex.	M3-M5	1.2 - 6	10.6 - 53	1,100	1.07	2.35	1/4"	75	13
TDCS-D30-700	1/4"Hex.	M4-M5	4 - 9	35 - 80	700	1.22	2.68	1/4"	75	13
TDCS-D30-500	1/4"Hex.	M4-M6	4 - 11	35 - 97	500	1.22	2.68	1/4"	75	13
TDCS-D40-550	1/4"Hex.	M5-M6	7 - 14	62 - 124	550	1.50	3.30	1/4"	80	17
TDCS-D50-380	1/4"Hex.	MG-MB	9 - 18	80 - 159	380	1.50	3.30	1/4"	80	17

Recommended Air Pressure: TDCS-D08,D10 : 70 PSI (Skg / cm²) / 0.5MPa; TDCS-D20,D30,D40,D50 : 85 PSI (6kg/cm²) / 0.6Mpa
Air Hose Size: 10mmx6.5mmx5m