


Lever Start

-Industrial Air Screwdrivers-

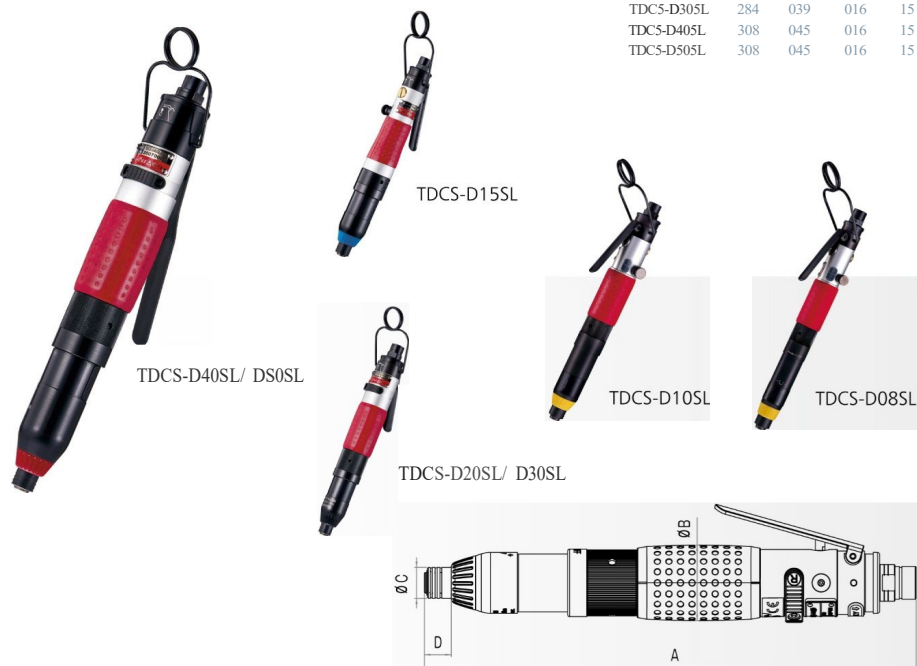

Dimensions (Unit)

	b		d	
TDCS-D08SL	238	026	016	16
TDCS-D10SL	246	031.5	016	16
TDCS-D15SL	241	036	016	15
TDCS-D20SL	254	039	016	15
TDCS-D30SL	284	039	016	15
TDCS-D40SL	308	045	016	15
TDCS-D50SL	308	045	016	15

Push Start

-Industrial Air Screwdrivers-



Dimensions (Unit)

	b		d	
TDCS-D08S	216.1	026	016	16
TDCS-D10S	229.1	031.5	016	16
TDCS-D15S	225	036	016	15
TDCS-D20S	242	039	016	15
TDCS-D30S	272	039	016	15
TDCS-D40S	295	045	016	15
TDCS-D50S	295	045	016	15

SPECIFICATIONS

Model	Torque Range											
TDCS-D08SL-1500	1/4" Hex.	M2	0.4 - 0.7	3.5 - 6.2	1,500	0.41	0.90	1/8"	73	3.5		
TDCS-D08SL-1100	1/4" Hex.	M2	0.4 - 1	3.5 - 8.8	1,100	0.41	0.90	1/8"	73	3.5		
TDCS-D10SL-1600	1/4" Hex.	M2-M3	0.7 - 1.3	6.2 - 11.5	1,600	0.63	1.39	1/8"	75	5.5	12	
TDCS-D10SL-900	1/4" Hex.	M3	0.7 - 2	6.2 - 17.7	900	0.63	1.39	1/8"	75	5.5	12	
TDCS-D15SL-2000	1/4" Hex.	M2-M3	0.5 - 2.5	4.4 - 22	2,000	0.71	1.56	1/8"	81	4.5	10	
TDCS-D15SL-1300	1/4" Hex.	M3-M4	0.8 - 3.5	7.1 - 31	1,300	0.71	1.56	1/8"	81	4.5	10	
TDCS-D15SL-1000	1/4" Hex.	M3-M4	0.8 - 4.5	7.1 - 40	1,000	0.71	1.56	1/8"	81	4.5	10	
TDCS-D15SL-750	1/4" Hex.	M3-M5	0.8 - 5	7.1 - 44	750	0.71	1.56	1/8"	81	4.5	10	
TDCS-D20SL-3500	1/4" Hex.	M3	0.7 - 2.3	6.2 - 20	3,500	0.87	1.91	1/4"	78		15	
TDCS-D20SL-3000	1/4" Hex.	M3-M4	0.8 - 3	7.1 - 27	3,000	0.87	1.91	1/4"	78		15	
TDCS-D20SL-2000	1/4" Hex.	M3-M4	0.8 - 4.5	7.1 - 40	2,000	0.87	1.91	1/4"	78		15	
TDCS-D20SL-1100	1/4" Hex.	M3-M5	1.2 - 6	10.6 - 53	1,100	0.87	1.91	1/4"	78		15	
TDCS-D30SL-700	1/4" Hex.	M4-M5	4 - 9	35 - 80	700	1.01	2.22	1/4"	78		15	
TDCS-D30SL-500	1/4" Hex.	M4-M6	4 - 11	35 - 97	500	1.01	2.22	1/4"	78		15	
TDCS-D40SL-550	1/4" Hex.	M5-M6	7 - 14	62 - 124	550	1.34	2.95	1/4"	83		17	
TDCS-D50SL-380	1/4" Hex.	M6-M8	9 - 18	80 - 159	380	1.34	2.95	1/4"	83		17	

Recommended Air Pressure : TDCS-008,010 : 70 PSI (5kg/cm²) / 0.5MPa; TDCS-D15,D20,D30,D40,D50 : 85 PSI (6kg/cm²) / 0.6MPa
Air Hose Size: 10mmx6.5mmx5m

SPECIFICATIONS

Model	Torque Range											
TDCS-D08S-1500	1/4" Hex.	M2	0.4 - 0.7	3.5 - 6.2	1,500	0.35	0.77	1/8"	73	3.5		
TDCS-D08S-1100	1/4" Hex.	M2	0.4 - 1	3.5 - 8.8	1,100	0.35	0.77	1/8"	73	3.5		
TDCS-D10S-1600	1/4" Hex.	M2-M3	0.7 - 1.3	6.2 - 11.5	1,600	0.60	1.32	1/8"	75	5.5	12	
TDCS-D10S-900	1/4" Hex.	M3	0.7 - 2	6.2 - 17.7	900	0.60	1.32	1/8"	75	5.5	12	
TDCS-D15S-2000	1/4" Hex.	M2-M3	0.5 - 2.5	4.4 - 22	2,000	0.66	1.45	1/8"	79	4.5	10	
TDCS-D15S-1300	1/4" Hex.	M3-M4	0.8 - 3.5	7.1 - 31	1,300	0.66	1.45	1/8"	79	4.5	10	
TDCS-D15S-1000	1/4" Hex.	M3-M4	0.8 - 4.5	7.1 - 40	1,000	0.66	1.45	1/8"	79	4.5	10	
TDCS-D15S-750	1/4" Hex.	M3-M5	0.8 - 5	7.1 - 44	750	0.66	1.45	1/8"	79	4.5	10	
TDCS-D20S-3500	1/4" Hex.	M3	0.7 - 2.3	6.2 - 20	3,500	0.82	1.80	1/4"	78	7.5	16	
TDCS-D20S-3000	1/4" Hex.	M3-M4	0.8 - 3	7.1 - 27	3,000	0.82	1.80	1/4"	78	7.5	16	
TDCS-D20S-2000	1/4" Hex.	M3-M4	0.8 - 4.5	7.1 - 40	2,000	0.82	1.80	1/4"	78	7.5	16	
TDCS-D20S-1100	1/4" Hex.	M3-M5	1.2 - 6	10.6 - 53	1,100	0.82	1.80	1/4"	78	7.5	16	
TDCS-D30S-700	1/4" Hex.	M4-M5	4 - 9	35 - 80	700	0.96	2.11	1/4"	78	7.5	16	
TDCS-D30S-500	1/4" Hex.	M4-M6	4 - 11	35 - 97	500	0.96	2.11	1/4"	78	7.5	16	
TDCS-D40S-550	1/4" Hex.	M5-M6	7 - 14	62 - 124	550	1.26	2.77	1/4"	82	9.5	20	
TDCS-D50S-380	1/4" Hex.	M6-M8	9 - 18	80 - 159	380	1.26	2.77	1/4"	82	9.5	20	

Recommended Air Pressure : TDCS-008,D10: 70 PSI (5kg/cm²) / 0.5MPa; TDCS-D15,D20,D30,D40,D50 : 85 PSI (6kg/cm²) / 0.6MPa
Air Hose Size: 10mmx6.5mmx5m