


Angle Type

-Industrial Air Screwdrivers-



RS/RQ TYPE

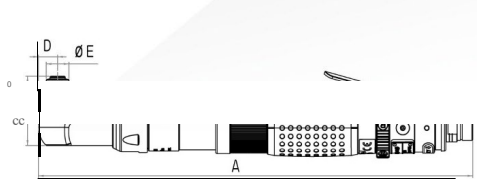

RW/RX/RQ TYPE

DIMENSIONS (mm)					
Model	a	b	d		
TDCS-D08RS-C	284.1	30	11.5	12	011
TDCS-D10RS-C	290.5	30	11.5	12	011
TDCS-D15RQ-C	292	33	17	13.5	016
TDCS-D15RW-C	292	33	13	13.5	1/4"
TDCS-D15RX-C	292	33	14	13.5	3/8"
TDCS-D20RQ-C	306	33	17	13.5	016
TDCS-D20RW-C	306	33	13	13.5	1/4"
TDCS-D20RX-C	306	33	14	13.5	3/8"
TDCS-D30RQ-C	336	33	17	13.5	016
TDCS-D30RW-C	336	33	13	13.5	1/4"
TDCS-D30RX-C	336	33	14	13.5	3/8"
TDCS-D40RX-C	366	38	14	16	3/8"
TDCS-D50RX-C	366	38	14	16	3/8"
TDCS-D6DRX-C	408	34	15	18.5	3/8"
TDCS-D60RY-C	408	34	19	18.5	1/2"
TDCS-D70RX	408	34	15	18.5	3/8"
TDCS-D70RY	408	34	19	18.5	1/2"

SPECIFICATIONS

Model	Drive Size	Screw Size	Torque Range		Free Speed				Noise Level	Air Consumption	
	inch	mm	Nm	in-lb	rpm				dB(A)	l/min	cfm
TDCS-D08RS-1500-C	1/4" Hex.	M2	0.4 - 0.7	3.5 - 6.2	1,500	0.56	1.23	1/8"	73	3.5	
TDCS-D08RS-1100-C	1/4" Hex.	M2	0.4 - 1	3.5 - 8.8	1,100	0.56	1.23	1/8"	73	3.5	
TDCS-D10RS-1600-C	1/4" Hex.	M2- M3	0.7 - 1.3	6.2 - 11.5	1,600	0.80	1.76	1/8"	75	5.5	12
TDCS-D10RS-900-C	1/4" Hex.	M3	0.7 - 2	6.2 - 17.7	900	0.80	1.76	1/8"	75	5.5	12
TDCS-D15RQ-1300-C	1/4" Hex.										
TDCS-D15RW-1300-C	1/4" Sq.	M3- M4	1 - 3.5	8.8 - 31	1,300	0.98	2.16	1/8"	81	4.5	10
TDCS-D15RX-1300-C	3/8" Sq.										
TDCS-D15RQ-800-C	1/4" Hex.										
TDCS-D15RW-800-C	1/4" Sq.	M3- M5	1.4 - 4.5	12.4 - 40	800	0.98	2.16	1/8"	81	4.5	10
TDCS-D15RX-800-C	3/8" Sq.										
TDCS-D15RQ-650-C	1/4" Hex.										
TDCS-D15RW-650-C	1/4" Sq.	M3- M5	1.4 - 6	12.4 - 53	650	0.98	2.16	1/8"	81	4.5	10
TDCS-D15RX-650-C	3/8" Sq.										
TDCS-D15RQ-500-C	1/4" Hex.										
TDCS-D15RW-500-C	1/4" Sq.	M3- M5	1.4 - 7	12.4 - 62	500	0.98	2.16	1/8"	81	4.5	10
TDCS-D15RX-500-C	3/8" Sq.										
TDCS-D20RQ-2200-C	1/4" Hex.										
TDCS-D20RW-2200-C	1/4" Sq.	M3- M4	1.2 - 3	10.6 - 27	2,200	1.14	2.51	1/4"	78		15
TDCS-D20RX-2200-C	3/8" Sq.										
TDCS-D20RQ-1900-C	1/4" Hex.										
TDCS-D20RW-1900-C	1/4" Sq.	M3- M4	1.4 - 4	12.4 - 35	1,900	1.14	2.51	1/4"	78		15
TDCS-D20RX-1900-C	3/8" Sq.										
TDCS-D20RQ-1300-C	1/4" Hex.										
TDCS-D20RW-1300-C	1/4" Sq.	M3- M5	1.4 - 6.5	12.4 - 58	1,300	1.14	2.51	1/4"	78		15
TDCS-D20RX-1300-C	3/8" Sq.										
TDCS-D20RQ-700-C	1/4" Hex.										
TDCS-D20RW-700-C	1/4" Sq.	M4- M5	2-8	17.7 - 71	700	1.14	2.51	1/4"	78		15
TDCS-D20RX-700-C	3/8" Sq.										
TDCS-D30RQ-480-C	1/4" Hex.										
TDCS-D30RW-480-C	1/4" Sq.	M5-M6	6 - 12	53 - 106	480	1.28	2.82	1/4"	78		15
TDCS-D30RX-480-C	3/8" Sq.										
TDCS-D30RQ-320-C	1/4" Hex.										
TDCS-D30RW-320-C	1/4" Sq.	M5-M6	6 - 15	53 - 133	320	1.28	2.82	1/4"	78		15
TDCS-D30RX-320-C	3/8" Sq.										
TDCS-D40RX-400-C	3/8" Sq.	M6-M8	10 - 18	89 - 160	400	1.75	3.85	1/4"	83	8	17
TDCS-D50RX-270-C	3/8" Sq.	MB	14 - 24	124 - 212	270	1.75	3.85	1/4"	83	8	17
TDCS-D60RX-120-C	3/8" Sq.										
TDCS-D60RY-120-C	1/2" Sq.	M8-M10	24 - 45	212 - 400	120	2.03	4.47	1/4"	83	8	17
TDCS-D70RX-100	3/8" Sq.										
TDCS-D70RY-100	1/2" Sq.	M10-M12	35 - 60	310 - 530	100	2.03	4.47	1/4"	83	8	17

Recommended Air Pressure : TDCS-D08,D10 : 70 PSI (Skg/cm²) / 0.5Mpa; TDCS-D1,D20,D30,D40,DS0,D60,D70 : 85 PSI (6kg/cm²) / 0.6Mpa
Air Hose Size : 10mmx6,5mmx5m